


# Standard Frequency Differential Oscillator

## 7D-Series (7050)

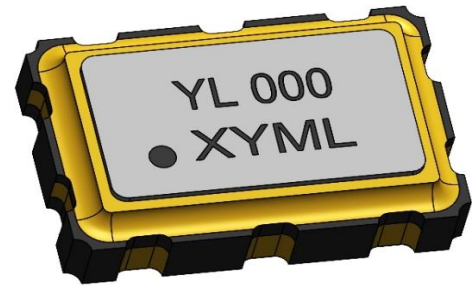

### ■ Features

- 7.0 x 5.0 x H1.4±0.15 mm
- LVDS output signaling types

### ■ Applications


- 10GB Ethernet, SONET, SATA, SAS, Fibre Channel, PCI-Express
- pci-Express Telecom, networking,
- instrumentation, storage, server



### ■ General Specifications

#	Items	Parameters
1	Frequency range	25 ~ 200 MHz
2	Output type	LVDS
3	Output Load	100 Ω
4	Supply voltage (V <sub>DD</sub> )	1.8 V, 2.5 V, 3.3 V
5	Operating temperature range	-20 to +70°C, -40 to +85°C, or specify
6	Storage temperature range	-55 to +125°C
7	Frequency stability vs. operating temperature range	± 100 ppm, or specify
8	Current consumption	80mA Max.
9	Output level V <sub>OH</sub>	1.4 V Typ.
10	Output level V <sub>OL</sub>	1.1 V Typ.
11	Offset voltage	1.25V Typ.
12	Offset error	50mV Typ.
13	Differential output voltage	350mV Typ.
14	Differential output error	40mV Typ.
15	Duty cycle	45 to 55%
16	Rise/fall time	1ns Max.
17	Phase Jitter ( 12 KHz ~ 20 MHz )	1.0ps Max.
18	Start-up time	10ms Max.

### ■ Package Dimensions, Pad Functions, & Recommended Land Pattern (Unit: mm)

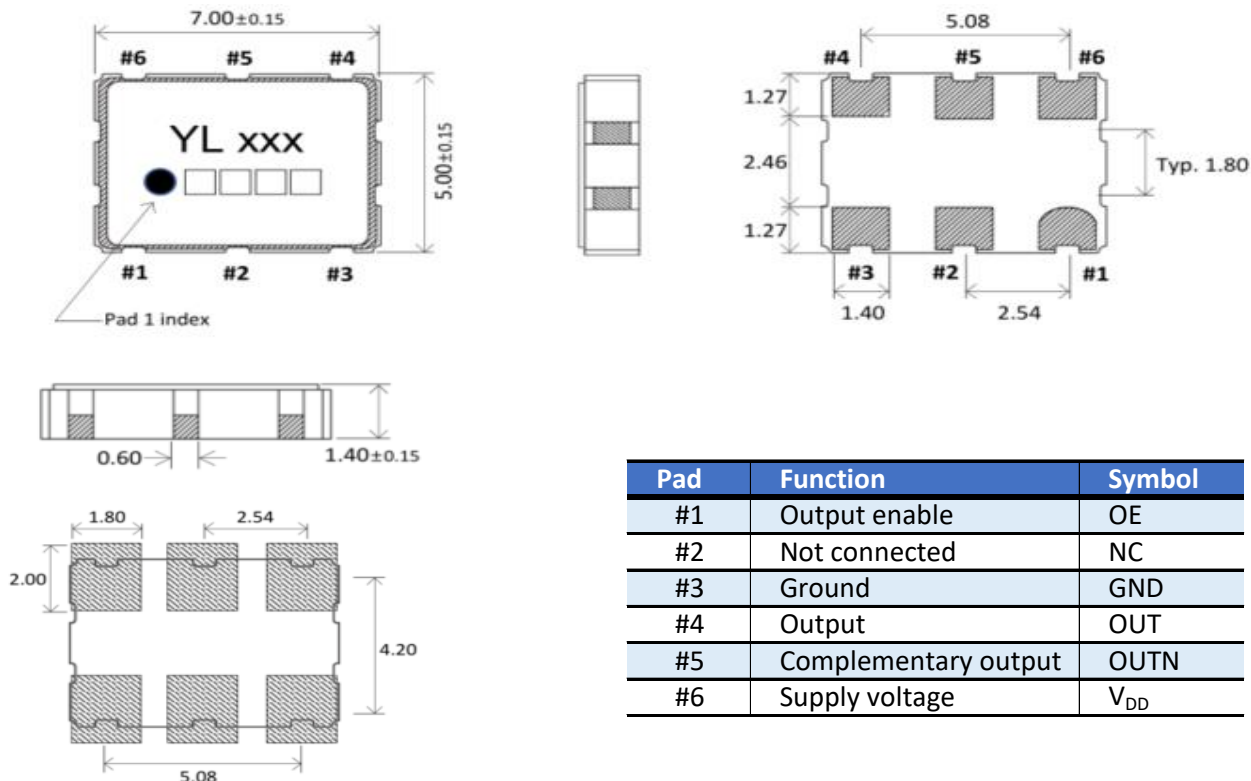

Pad	Function	Symbol
#1	Output enable	OE
#2	Not connected	NC
#3	Ground	GND
#4	Output	OUT
#5	Complementary output	OUTN
#6	Supply voltage	V <sub>DD</sub>

Visit website

